

WATCHDOG 550 GUIDE: *How to Close*



Tools:

Phillips Head Screwdriver


-or-

#2 Phillips Drill


1. First, gently place the cover back on the dehumidifier.



2. Next, you will need to secure both sides of the cabinet. Start by replacing the 2 screws on the duct adapter side of the machine.

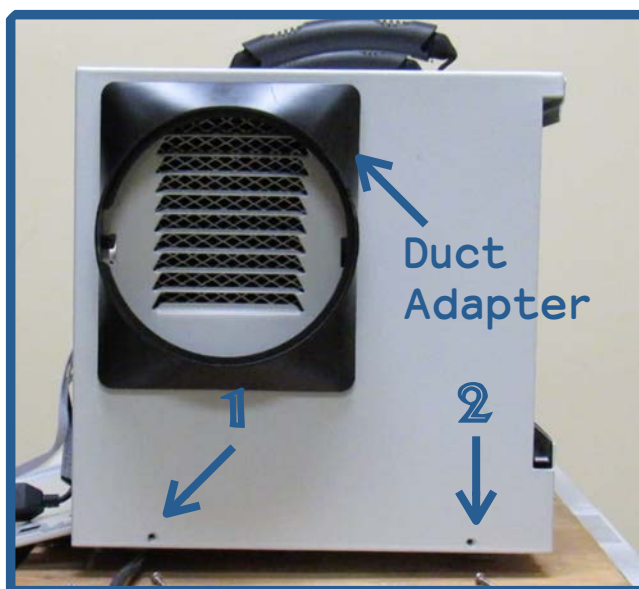


3. Next, replace the 3 screws on the drain hose side of the machine.

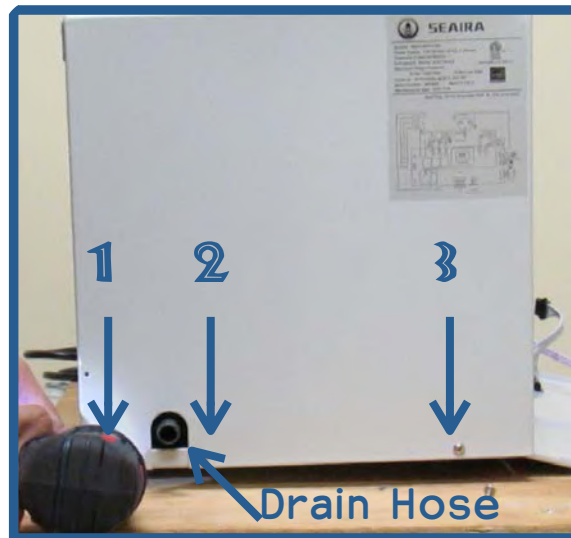

4. At this point, you can close the cabinet door and secure the safety latch.



5. Next, use the screwdriver or drill to replace the two screws holding the cabinet door in place.

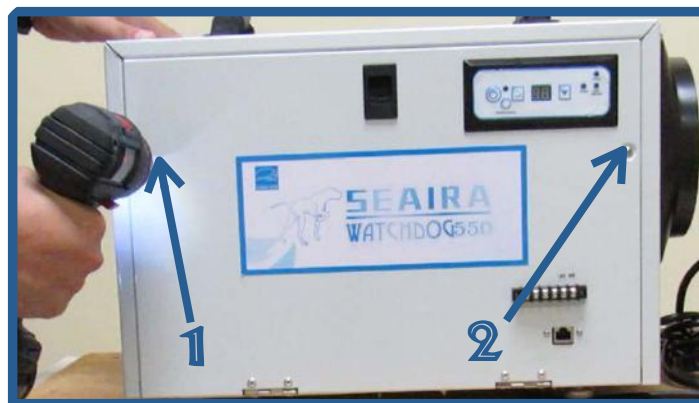

6. Finally, slide the filter back in place.

