



WatchDog 550



Installation and Operation Manual

Read These Instructions Carefully Before Proceeding

www.SeairaGlobal.com

Table Of Contents

	Page #
Safety Instructions	3
Warranty Registration	3
How the Dehumidifier Works	4
Dehumidifier Specs	4
Installation Requirements	5
Installation	5
Using the Dehumidifier Display	7
Indicator Lights on the Display	7
Remote Control Setup	8
Remote Control Diagram	9
Unit Diagram	10
Maintenance	10
Troubleshooting	12
Spare Parts	13
Warranty	14

Safety Instructions

Read these instructions carefully and completely before continuing with the installation.

Warning

- Install dehumidifier according to all applicable local, state and national codes.
- Connect your dehumidifier to a grounded, dedicated electrical connection that is GFCI protected with 15 amp capacity. Do not use an extension cord or plug adapter.
 - The use of any other type of electrical connection will void the warranty.
 - Be sure to follow your GFCI manufacturer's maintenance instructions.
- Unless otherwise noted, all maintenance should be done with the unit powered off.

Caution

- Do not insert objects or your fingers into the inlet or discharge of the dehumidifier.
- Do not use water to clean the exterior of the unit. To clean the unit, unplug the dehumidifier and then use a damp cloth to wipe the exterior.
- Your dehumidifier should only be serviced or repaired by a qualified technician.
- Do not stand on the dehumidifier or place objects on it.
- This unit is not designed for swimming pool applications.
- If installing in an attic, place the unit in a drain pan per local building codes.

Warranty Registration

Your dehumidifier comes with an extensive warranty. To register your unit, simply fill out and return the warranty form provided in the box, or visit our website.

For future reference, write down the model, serial number and date of purchase. This information is necessary for seeking assistance in the future and can be found on the data label on the side of the unit.

Model Number:

Date Of Purchase:

Serial Number:

How the Dehumidifier Works

The Watchdog Dehumidifier is a dehumidifier that can be used in a variety of ways to control the humidity level in your entire home. In the simplest terms, when the humidity level exceeds the setpoint of the humidity controller, the dehumidifier will energize. The internal fan and compressor will turn on, forcing air to be drawn across the evaporator coil, which is cooler than the dewpoint of the air, allowing the coil to remove water from the air and exit via the drain. The air is then reheated as it flows across the condenser coil and distributed back into the conditioned space.

Dehumidifier Specs

Model	550
Capacity (80°F / 60%)	55 ppd
Capacity (65°F / 60%)	35 ppd
Power Supply	115V/60 Hz
Operating Temp.	33 - 105°F
Airflow @ 0.0"	130 CFM

Installation Requirements

- The area where the dehumidifier is located should be sealed with a vapor barrier.
- If the unit is installed in a crawlspace, all vents should be sealed.
- For proper ventilation, neither the inlet or the discharge should be positioned against a wall. The inlet needs a minimum of 12" clearance and the discharge requires a minimum of 36" clearance.
- For the best air diffusion, install the unit so that a side panel faces the wall.
- WatchDog Dehumidifiers are only intended for operation when the unit is upright and level with the feet on the ground (unless using a WatchDog Hanging Kit).

Installation

1. Unit Placement

- Place dehumidifier on a level surface.
- *Important: If the unit has been turned or flipped so that the compressor did not remain upright, place on a level surface and wait a minimum of 2 hours before proceeding*
- Do not place the unit directly on a vapor barrier.

2. Drain Installation

Your dehumidifier comes with a 6' section of drain line and a 3/4" PVC adapter. Choose the method below that best fits your application.

General Requirements

- The drain line must be routed to a suitable drain option (floor drain, sump pump, etc).
- The drain line must flow downwards with **no loops or kinks**.
- Maintain a minimum 1" downward slope per 10' run.


Option 1: Vertical Drop to PVC (Recommended)

This method uses a short run of tubing, then transitions immediately to PVC. This option does not require a trap in most cases.

- a. Construct the PVC Assembly: Cut a **6" piece of 3/4" PVC** and insert it into a **PVC elbow**. Attach your **main PVC drain line** (long pipe running to the drain) to the

other side of the elbow to create an “L” configuration. Keep the drain line as short as possible.


- b. Prepare the Flexible Drain Hose: Cut the **provided drain hose** to approximately 6” long and slide onto dehumidifier drain port.
- c. Connect the Systems: Insert the open end of the flexible hose into the vertical 6” PVC pipe. Ensure the hose does not extend past the 6” pipe into the elbow fitting. Support PVC so it maintains a downward slope (minimum 1” drop per 10’ run).

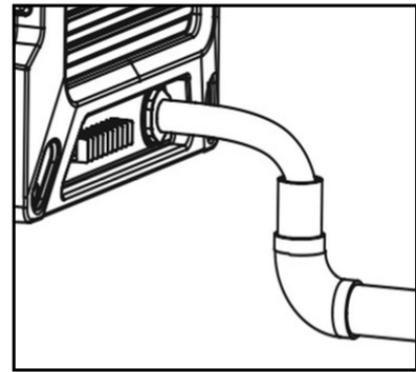

Option 2: Extended Flexible Hose

This method uses the full length of the provided hose. Because the hose runs along the floor without an immediate vertical drop, a trap is required to prevent air lock.

- a. Connect the Hose: Slide the provided **6' flexible drain hose** onto the dehumidifier drain connection. Secure with a tie wrap or clamp, if desired.
- b. Create a Trap: Form a “U” shape (trap) in the hose approximately 10” away from the unit. The bottom of the trap must be lower than the drain port, and the hose must rise back up slightly before sloping down to the drain. Use a zip tie or tape to help the trap maintain its shape.
- c. Route to Drain: Route the hose to the floor drain or sump pump. Support the line to ensure a continuous downward slope (minimum 1” drop per 10’ run) and verify there are no *upward* loops or kinks after the trap.

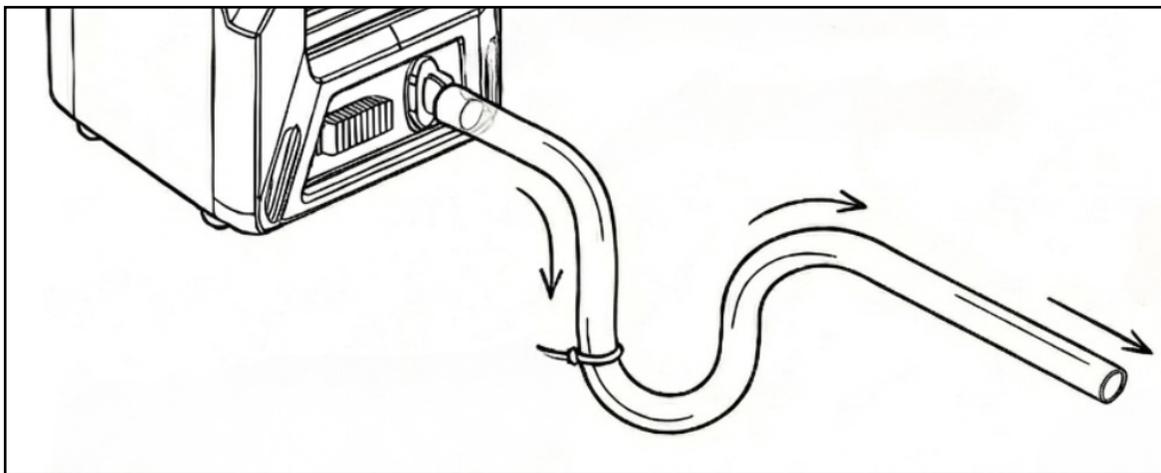


3. Electrical Power

Plug the dehumidifier into a dedicated 15 amp, GFCI protected outlet.

Using the Dehumidifier Display

Note: If connected to a HVAC system, display functions on the dehumidifier will not work.

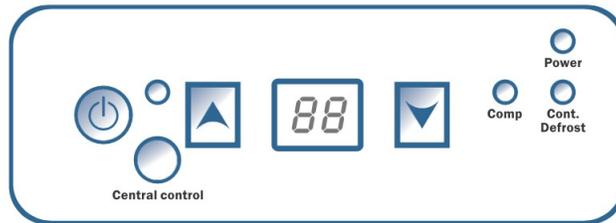

1. Power Key

- Use this button to turn the machine on and off.
- Press once to turn the machine on. You will hear two beeps and the  light will illuminate (solid or flashing depending on the mode).
- Press the power button down a second time and you will hear one beep as the machine shuts down. Note that there is a 1 minute fan delay.

2. Arrow Buttons

- Use the up and down arrows to set the desired humidity setpoint on the display screen 
- The setpoint can be any number between 36% - 90%. When the indoor humidity is higher than the setpoint, the unit will operate.
- Keep in mind that the displayed humidity levels are approximate (+/- 5%).

3. Continuous Mode

- To set the unit to run continuously, regardless of humidity, simply use the down arrow to set the humidity below 36%.
- The continuous light will illuminate green and the display will show "CO".
- To switch back to normal humidistat operation, use the arrow keys to move the setpoint above 36%.

4. Central Control

- This mode is not applicable for the WatchDog 550.

Indicator Lights on the Display

1. Humidity Display Screen

- The display screen has two functions:
 - When the unit is powered on, it shows the humidity of the space
 - When setting the desired humidity level, the screen will show the set point. After a brief delay, it will revert to the current humidity of the space.

2. Power Indicator Light



- a. This light indicates that the unit is properly powered on and ready to operate.
- b. Always make sure the unit is “off” prior to performing any service, unless otherwise indicated.
- c. If the humidity is above the setpoint, the light will be solid green and the machine will operate.
- d. If the humidity is below the setpoint, the unit will be in standby mode and the light will be flashing.

3. Continuous Mode / Auto Defrost Light



- a. When the light illuminates green, it indicates that the dehumidifier is set to continuous operation mode.
- b. When the light illuminates red, it means the unit is in auto defrost mode and clearing the evaporator coils of any ice buildup.

4. Compressor Light



- a. When the light illuminates red, it indicates the compressor has been initiated but is currently warming up.
- b. Once the light switches to green, it means the compressor is currently in working status.

Remote Control Setup

WatchDog Dehumidifiers can be controlled using an optional remote control accessory (W-100). The remote connects to the CAT 5 port on the dehumidifier, which is located next to the terminal strip. This is useful if:

1. You install the dehumidifier in one room with the conditioned air ducted into a second room that contains the remote.
 - a. For this set-up, select the ducted option using the “M” (mode) button on the remote.
2. You install the dehumidifier in a crawlspace or basement, and would like to control the dehumidifier from a different room.
 - a. For this set-up, select the dehumidifier sensor option using the “M” (mode) button on the remote.

How to Use a Remote Control

1. On / Off Power Button

Press the on/off button and the machine will start running. Press the on/off button again to turn the machine off.

2. Up / Down Arrows

Use the Up and Down arrow buttons to adjust the humidity level.

3. Mode Button

Use the Mode button to switch between dehumidification and a ducted application.

4. Temperature Button


The T button changes the temperature reading on your remote. The remote comes from the factory in Celsius. Press the T button once and it will switch to Fahrenheit.

5. Continuous Button


Press this button to switch the unit into continuous mode. "Cont" will appear on the display to indicate continuous mode.

6. Drain Pump

Pressing the drain pump button will remove water from the pump reservoir, so the unit can be safely moved or stored. *THIS FUNCTION IS ONLY AVAILABLE ON PUMP MODEL DEHUMIDIFIERS.*

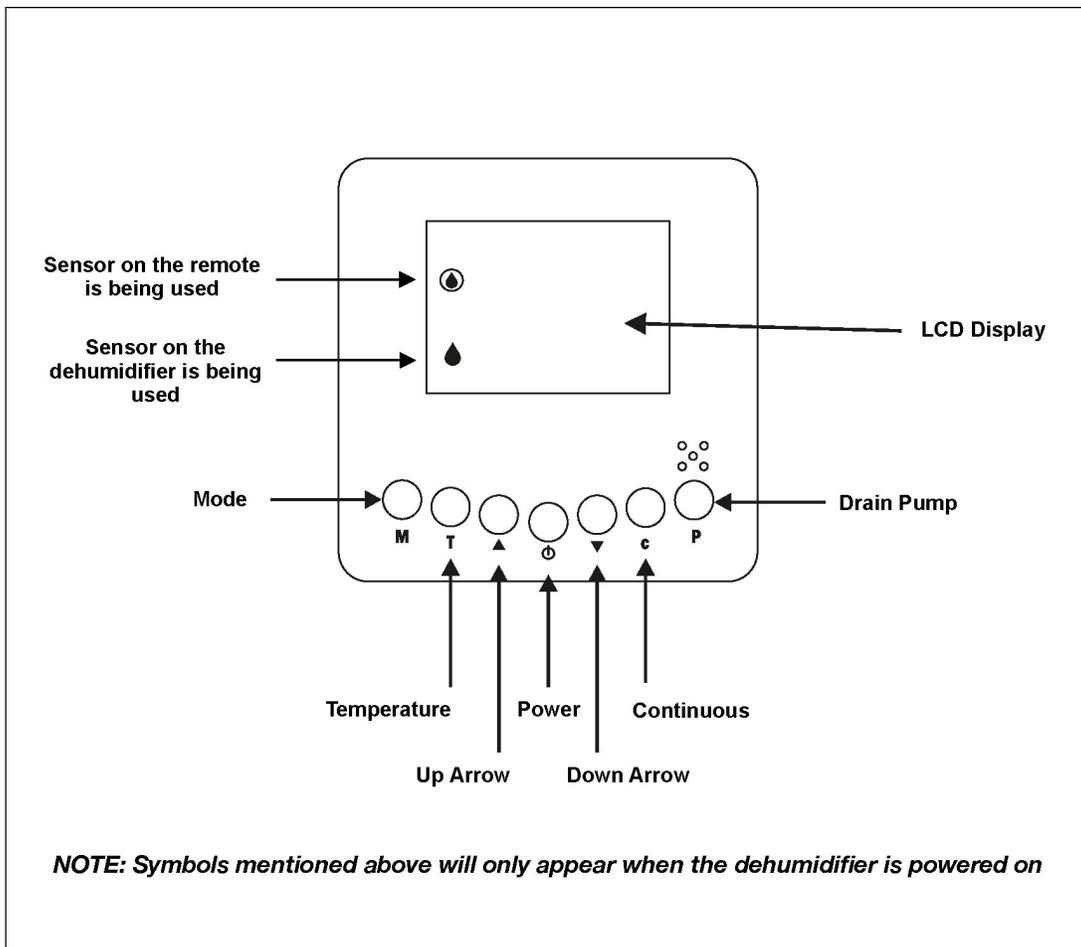

Unit Diagram

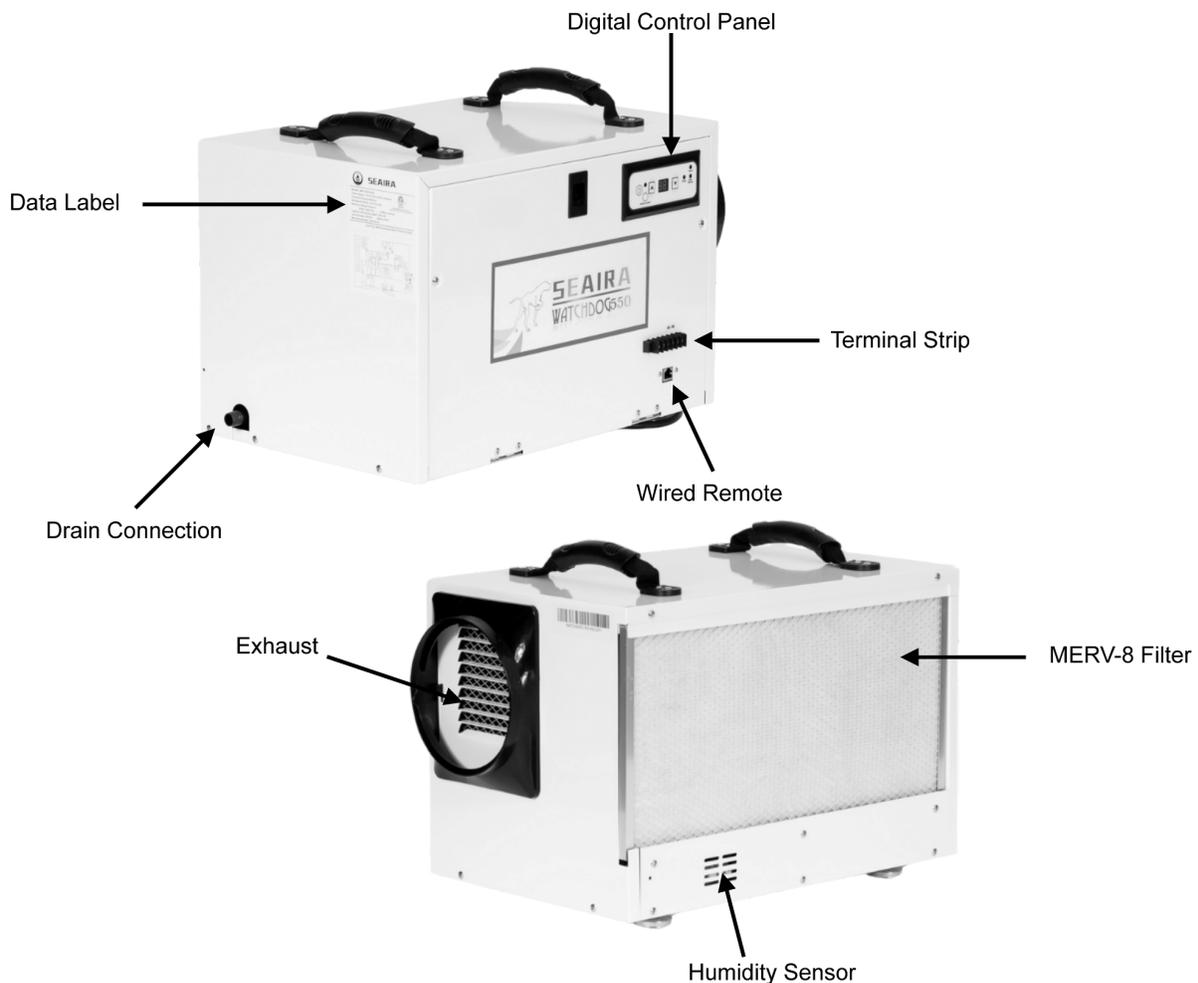

Maintenance

Warning: Always unplug the dehumidifier before performing any maintenance.

Cleaning Exterior Shell

Use a soft damp cloth to clean the exterior of the unit. Do not use any soap or solvents

Coil Maintenance

At least once per year, spray the coils with an approved coil clean. The coil cleaner should be a self-rinsing, foaming cleaner, such as WEB® Coil Cleaner.

Filter Maintenance

1. MERV-8 / HEPA / Carbon: Check at least once per year and replace, as needed.

Cleaning the Gravity Drain

Complete approx. once per year, depending on the environment.

1. Unplug the dehumidifier.
2. Mix a 16 ounce solution of vinegar (4 ounces white vinegar + 12 ounces water) or bleach (1 ounce bleach + 15 ounces water).
3. Remove the filters so you have access to the drain tray.
4. Pour the cleaning solution into the drain tray at the base of the coils. If any cleaning solution gets on the coils, flush with water.
5. Allow solution to soak for 15 minutes.
6. Pour in 32 ounces of clean water to flush out the drain line.

For more detailed instructions, visit www.SeairaGlobal.com

Troubleshooting

Symptom	Cause	Solution
Display is Blank	Poor Connection	Make sure power cord is plugged in
	Power Outage	Reset power
No Airflow	Filter is Dirty	Clean the filter(s)
	Air Inlet or Outlet is Blocked	Clear the blockage
E1 Error Code	Humidity Sensor or Communication Error	Check that the sensor wire is connected at both ends. If no issue, the sensor may be faulty
LO Error Code	Room Temperature is below 33°F	Increase room temperature so it's within operating range. If issue persists, check the sensor
HI Error Code	Room Temperature is above 105°F	Decrease the room temperature so it's within operating range. If issue persists, check the sensor
Tripped GFCI Outlet or Breaker	Not a Dedicated Circuit	Identify all sources connected to outlet and confirm source of trip. If it is dehumidifier, contact technical support. If not, move dehumidifier to dedicated circuit for future use.
	Defective GFCI	Replace outlet
	Dirt, Dust, or Moisture on Outlet	Clean or replace outlet
	Lightning or External Electrical Surge	Reset or replace breaker/GFCI, as needed
Note: Dehumidifier will not function until error code is cleared.		

Spare Parts

All Models	
W-100	Wired Remote Control Assembly
X-101	Remote Monitor System
W-112	WatchDog Hanging Kit
X-102	External Pump
WatchDog 550	
W-517	MERV - 8 Filter
W-518	HEPA Filter
W-519	Carbon Filter

Warranty

All warranty benefits apply to the original owner only. Warranty cannot be transferred or assigned.

5 Years (From Date of Purchase): Seaira Global warrants the dehumidifier will operate free of defects in workmanship and materials. At its discretion, Seaira Global will repair or replace any malfunctioning components, free of charge (excluding transportation costs).

Customer Responsibilities: In order to take advantage of the warranty service, the customer must do the following:

1. Customer must provide normal care and maintenance (including, but not limited to cleaning filters, coils and pumps)
2. Removal and re-installation of unit is the sole responsibility of owner.
3. If customer cannot return unit to Seaira Global, all costs associated with shipment are borne by the customer. In addition, all ancillary charges related to shipments, including but not limited to palletizing, wrapping, labeling, and pickup are associated with customer.
4. If shipped, customer is responsible for all risk of loss or damage.

Warranty Procedure:

1. Customer must mail in warranty registration card to Seaira Global. If no card is submitted, warranty period will begin the day the shipment left the warehouse.
2. If warranty service is necessary, customer must contact Seaira Global Tech Support by phone 910-660-0962 to receive a Return Authorization (RA) number.
3. Once an RA has been issued, it is the customer's job to bring the unit to Seaira Global. If this is not an option, shipping will be arranged to bring the unit back to the Seaira warehouse (at the expense of the customer).
4. After the unit has been received by Seaira Global, an initial inspection will be completed, if it is determined to be an invalid warranty claim (see exclusions below), unit will only be completed after receiving payment from customer for all associated costs.
5. If unit is defective, the necessary parts will be repaired or replaced and the unit will be available for pickup at Seaira Global or returned via shipment (at customer's expense). Keep in mind that work is only done during normal working hours. After being repaired, all units are required to go through a rigorous testing process prior to being returned to customer.
6. Once a part is repaired and the dehumidifier is returned, the original warranty period still applies (no extensions).

EXCLUSIONS:

DAMAGE DUE TO THE FOLLOWING IS NOT covered under warranty

1. Acts of Nature- Including but not limited to:

- Flooding
- Fire
- Water damage
- Hurricane/storm damage

2. Improper Usage - Including but not limited to:

- Pool/spa/tub applications
- Misuse, abuse, or tampering whether intentional or accidental
- Improper installation or design
- Improper voltage
- Lack of normal care
- Failure to follow instructions

3. Corrosion

4. Freezing

5. Any additional costs due to changes in laws or building codes

6. Freight charges

7. Any costs due to lost profit or delay

8. Damage to property

9. Cause beyond control

10. Consumable parts, including but not limited to:

- Filters
- Batteries
- Power cords
- Valves
- Switches
- Rubber parts

11. Applicable Law and Venue

All aspects of this agreement shall be interpreted by and under the laws of the state of North Carolina. Any litigation, enforcement of arbitration, or litigation related to this agreement shall be brought in the appropriate court in New Hanover County, North Carolina.

12. Direct, Indirect, Collateral or Inconsequential Damages of Any Kind

The warranties and liabilities set forth are in lieu of all other warranties expressed or implied, in law or in fact, including implied warranties of merchantability and fitness for a particular purpose. Seaira Global's total liability, regardless of nature of claim shall not exceed original purchase price of the product. If a product or component is replaced while under warranty, the applicable warranty period shall not be extended beyond the original warranty time period.

The foregoing shall constitute the total liability of seller in the case of defective performance of all or any of the equipment or services provided to Buyer. Buyer agrees to accept and hereby accepts the foregoing as the sole and exclusive remedy for any breach or alleged breach of warranty by Seller.

Any dishonesty or fraud in connection with Seaira Global warranty thoroughly voids all warranty policies. Seaira Global expressly reserves the right to pursue legal action in the event of dishonesty, fraud, or attempted fraud.